

# Ultimo

LUXURY VINYL TILES



100% Made In Belgium



# Intro

ULTIMO

Luxury Vinyl Tiles (LVT) floors are a popular choice in homes because of the numerous benefits they offer. The durable vinyl planks and tiles consist of different layers, each one offering a specific characteristic. Developed and made in Belgium, Ultimo comes with the well-known benefits of LVT flooring: comfort, softness and warmth, while providing a seven-layer floor that gives the ultimate in performance.

Our design team went the extra distance to create a high-quality collection: a wide range of close to nature wood and stone effects in shades that bring an authentic look to every interior.

“

*Ultimate in performance, these Belgian-made floors are a delight to the eye.*

”



Chapman Oak 24239





Paris Oak 22942

# Why choose Ultimo?

## BENEFITS OF ULTIMO

Soft, warm and quiet, Ultimo is a floor that makes everyone feel comfortable. What's more, its durable and long-lasting finish is beautifully simple to look after.

### High-quality

Made in Belgium, Ultimo's performance multi-layer construction is strong, stable and resistant to temperature changes. This means a floor that's been tested to meet Class 23 and 33, proving its quality for every type of room.



### Authentic beauty

With a design and finish that are close to nature, Ultimo stays faithful to the beauty of wood and stone. Its minimal pattern repeat means every room enjoys a natural look.



### Easy-going comfort

Choosing Ultimo means choosing a floor that's quickly installed and easy to maintain. Its soft underfoot feel, warmth and noise absorption guarantee a comfortable space.



### For a better planet

Because it lasts, Ultimo is a great sustainable choice. With recycled content and low impact manufacturing in Belgium, this is a floor that takes its responsibility to the planet seriously.



# Installation


## VINYL CLICK & DRYBACK SYSTEM




Ultimo is remarkably easy to install. Available in either glue or click flavours, you can choose the method that's best for you. Stick down or lock together, Ultimo's world-class dimensional stability and high-strength compact layer deliver a lasting result.

### CLICK

### DRYBACK

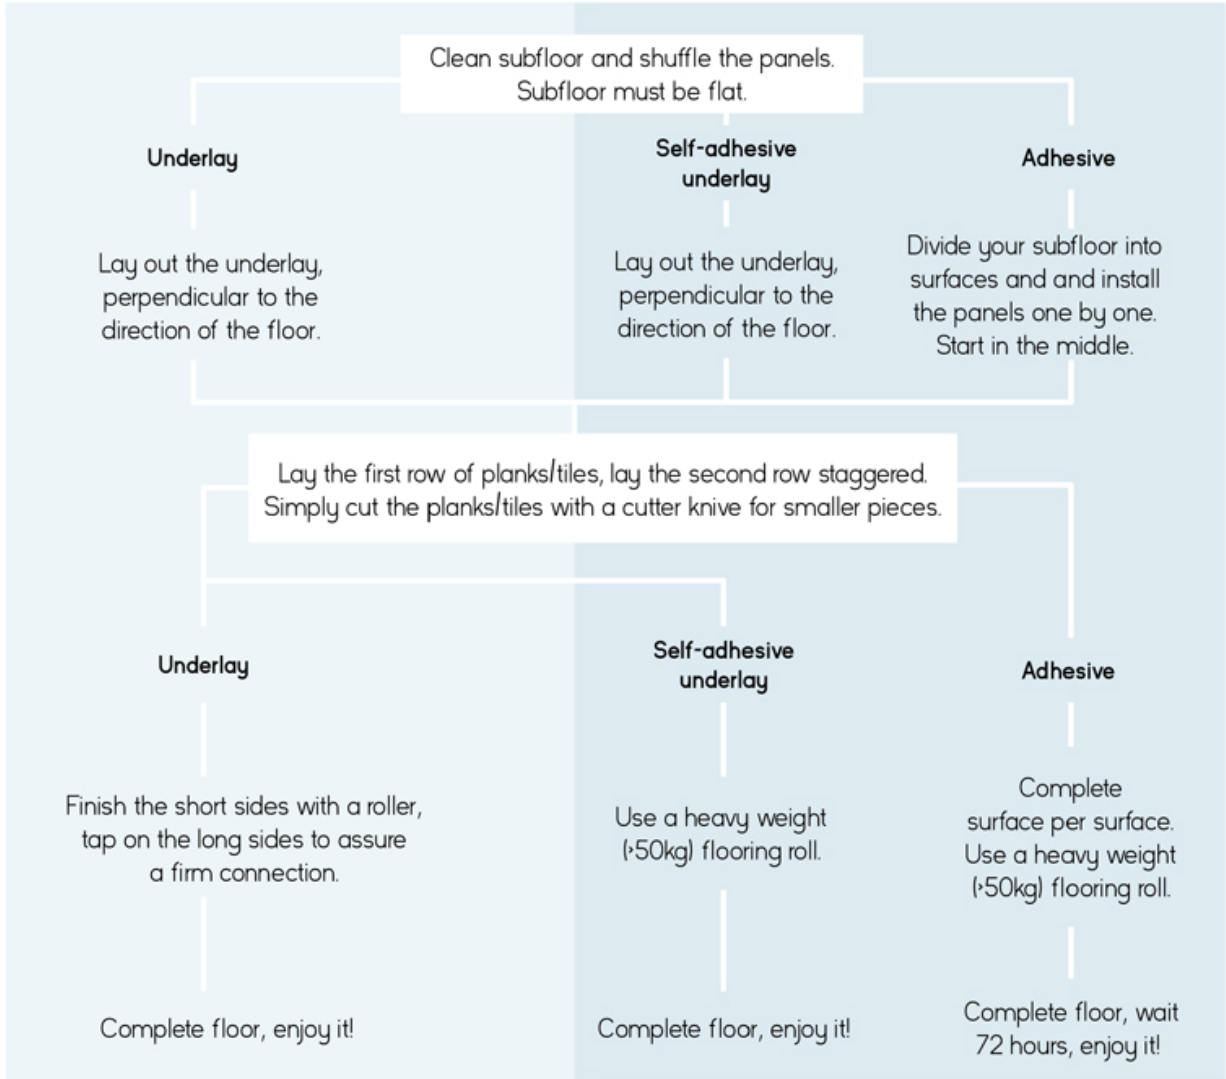

### Choose the correct underlay/adhesive

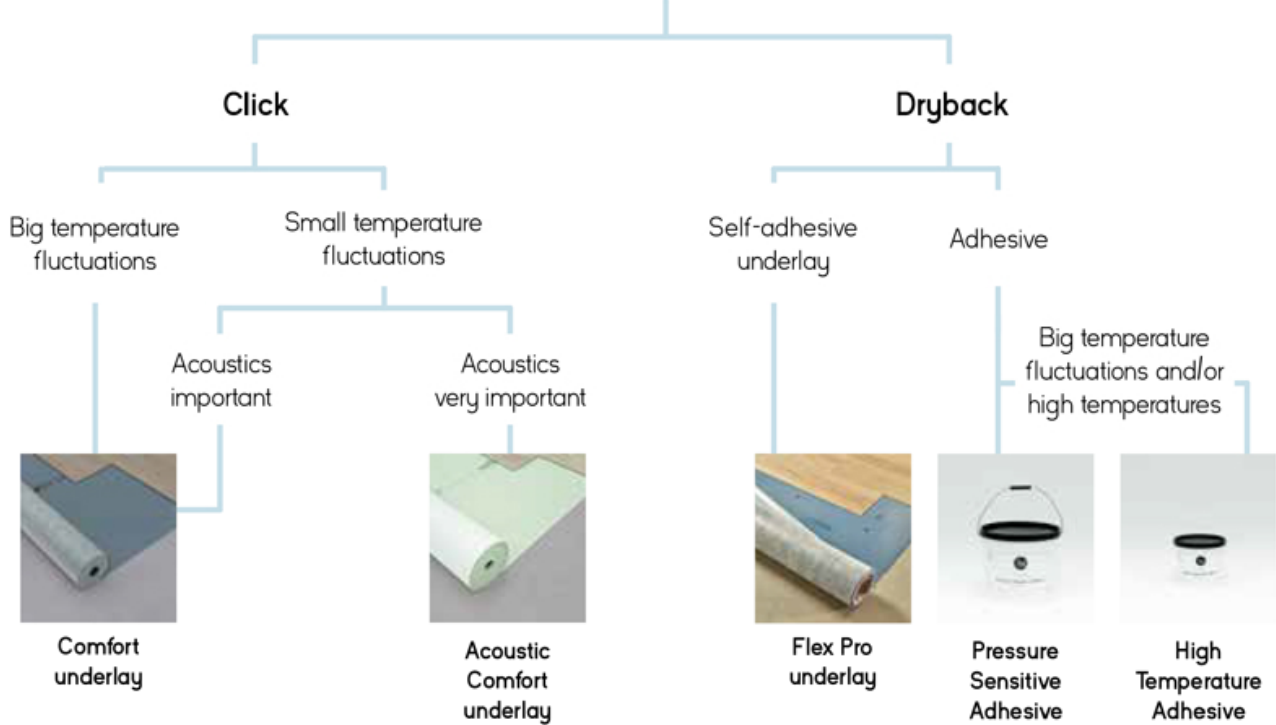

For detailed **Click** installation instructions, please check [www.installandclean.com/en/lvtclick](http://www.installandclean.com/en/lvtclick)

For detailed **Dryback** installation instructions, please check [www.installandclean.com/en/lvtdryback](http://www.installandclean.com/en/lvtdryback)



Summer Oak 24935

### Summer Oak



24935

Stock: 448m2



24244

Stock: 540 m2

 **Click Unidrop®**  
Available in:  
19,1 x 131,6 cm

 **4 sided bevel**

 **Thickness**  
4,5 mm

 **Wear layer**  
0,55 mm



Paris Oak 22230

Paris Oak



22230

Stock: 59 m2

Chapman Oak



24239

Stock: 0 m2

 **Click Unidrop®**  
Available in:  
19,1 x 131,6 cm

 **4 sided bevel**

 **Thickness**  
4,5 mm

 **Wear layer**  
0,55 mm

# Technical specifications

## TECHNICAL INFO OF ULTIMO

Dryback

Click

### PRODUCT INFORMATION

Level of use	EN ISO 10874	23 - 33 - 41	23 - 33
Total thickness	EN ISO 24346	25 mm	4.5 mm
Wear layer	EN ISO 24340	0.55 mm	0.55 mm
Wear Layer PUR treatment		Superguard Pro®	Superguard Pro®
Total weight g/m <sup>2</sup>	EN ISO 23997	4105.5	7805.5

### SIZE & PACKING

Planks	EN ISO 24342	19.6 x 132 cm	19.1 x 131.6 cm
Tiles	EN ISO 24342	32.9 x 65.9 cm	32.4 x 65.5 cm
Box planks		3.62 m <sup>2</sup> 14 pcs/box	1.76 m <sup>2</sup> 7 pcs/box
Box tiles		3.47 m <sup>2</sup> 16 pcs/box	1.49 m <sup>2</sup> 7 pcs/box

### TEST RESULTS

Inflammability	EN 13501	Bfl-S1	
Abrasion group	EN ISO 660-2	Class T	
Scratch resistance	EN 16094	≤MSR-A2, ≤MSR-B2	
Squareness	EN ISO 24342	± 0.35 mm	
Straightness	EN ISO 24342b	± 0.35 mm	
Slip resistance	EN 13893	DS	
Slip restraint	DIN 51130	R10	
Residual indentation	EN ISO 24343-1	Norm: ≤ 0.10 mm Average result: 0.03 mm	
Furniture leg resistance	EN ISO 16581	No cracks, no damage	
Curling	EN ISO 23999	± 1.21 mm	± 1.11 mm
Dimensional stability	EN ISO 20326	Norm: ± 1.0251 % Average result: ± 1.0051 %	Norm: ± 1.0151 % Average result: ± 1.0051 %
Thermal resistance R	EN 12667	0.0100 m <sup>2</sup> K/W	0.0159 m <sup>2</sup> K/W
Acoustic insulation	EN ISO 717-2	4 dB	
Acoustic insulation + Xtrafloor Acoustic Comfort		19 dB	
Castor chair resistance	EN ISO 4918	No damage to wearlayer, no delamination	
Stain resistance	EN ISO 26987	Very good	
Light fastness	EN ISO 105-B02	≥ 6	
Underfloor heating and cooling	EN 12524	Suitable, max 27°C	
Maximum allowed ambient and surface temperature		45° C	
Warranty (year)		20 Residential - 10 Commercial	



Paris Oak 22942



The warranty covers manufacturing defects and premature wear in the event of normal use.

# Meet IVC Group

IVC Group is a global player in the design and manufacturing of flooring solutions including Carpet Tiles, Luxury Vinyl Tiles (LVT), Heterogeneous Vinyl for use in business, public and private environments. Accountable for our actions, we design and make floors responsibly in Belgium, developing a circular approach to the future of flooring.

IVC Group is part of Mohawk Industries Inc., the world's largest flooring company. With 1,500 employees and 7 production sites in Europe and Russia, IVC Group produces over 130,000,000 m<sup>2</sup> of flooring every year.

### Did you know...

that IVC Group employs over 30 different nationalities worldwide? That's the many cultures and inspirations which go into our eclectic floor designs, explaining their global appeal.




Flooring Development Centre in Waregem, Belgium



On site wind farm to produce our own clean electricity in Belgium

## How we make our floors better for the environment?

At IVC Group, we truly believe in products that are developed with the future in mind. That's why we take the time to pause and reflect on the impacts of our entire strategy and operation, and we aim to contribute to the welfare of our planet and our people.

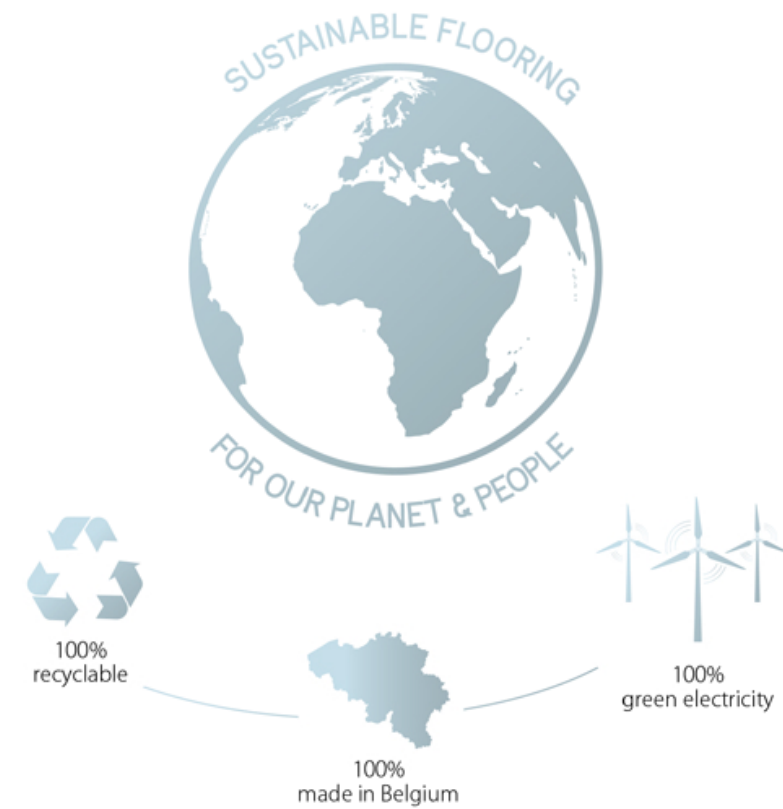

Read all about it in our [sustainability whitepaper](#)



